



type EMU

	bk	wh	bn	gn	rd	yo	bu	pk	or	gr
EST	must	valge	pruun	roheline	punane	kollane	sinine	roosa	oranz	hall
RU	черный	белый	коричневый	зеленый	красный	желтый	синий	розовый	оранжевый	серый
GB	black	white	brown	green	red	yellow	blue	pink	orange	gray



WHO-BC
E20 10R-04 3694

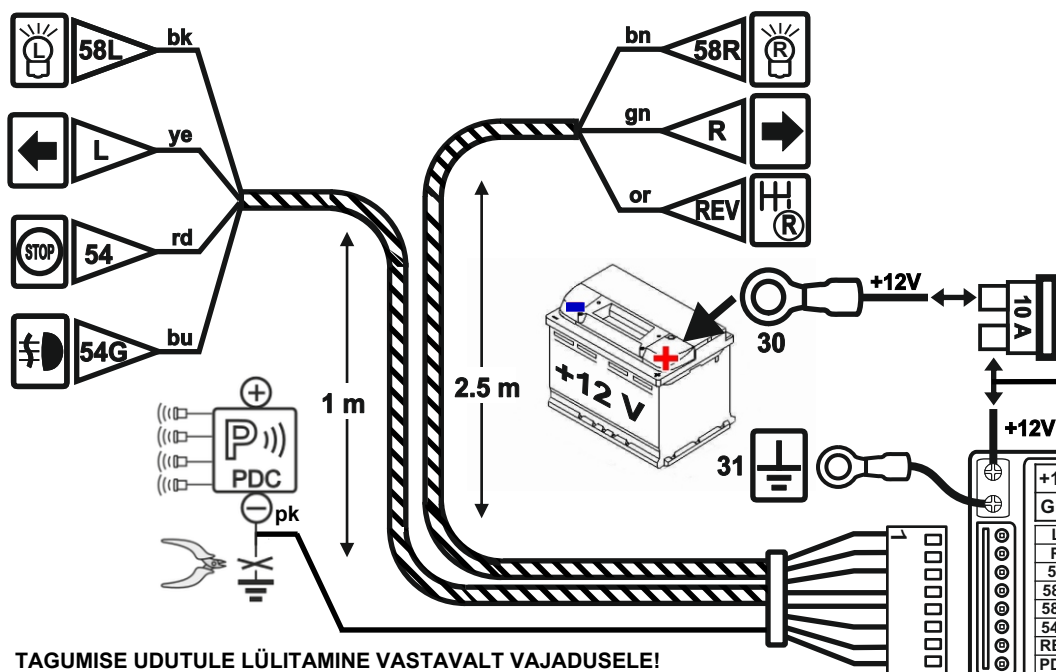

!	max	min
1/L	10W + 21W	0,50 mm ²
4/R	10W + 21W	0,50 mm ²
5/58R	3 x 5W	0,75 mm ²
7/58L	3 x 5W	0,75 mm ²
6/54	3 x 21W	0,75 mm ²
2/54G	21W	0,50 mm ²
8/REV	21W	0,50 mm ²
3/GND	-	1,50 mm ²
+12V	-	2,50 mm ²

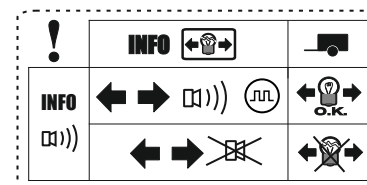


EM4
7 pin.



NB! SKEEMI VAADE

TAGUMISE UDUTULE LÜLITAMINE VASTAVALT VAJADUSELE!

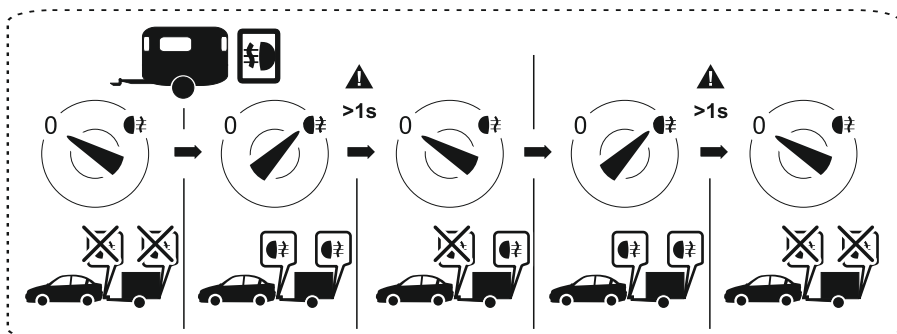

NB! Moodul hakkab tööle automaatselt, kui tekib takistus voolujuhtmele: suunatuli, gabariidituli, pidurituli. Kontrollides parkimisandurite tööd peale haagisepistiku eemaldamist soovitate vajutada korra pidurile, et moodul saaks signaali pistiku eemaldamise kohta.

+15VDC (ACC)

EM5
13 pin.